


Nonius Hanger for UA 50, Bottom Part

Description:

Nonius Hanger for UA 50, Bottom Part, for suspension of Premium Profiles UA 50 construction to the structural ceiling (concrete, timber, etc.) in cases of increased load-bearing capacity requirements.

The grey-colored zinc coating guarantees vast corrosion resistance of the element.

Metal gauge: 0.8 mm

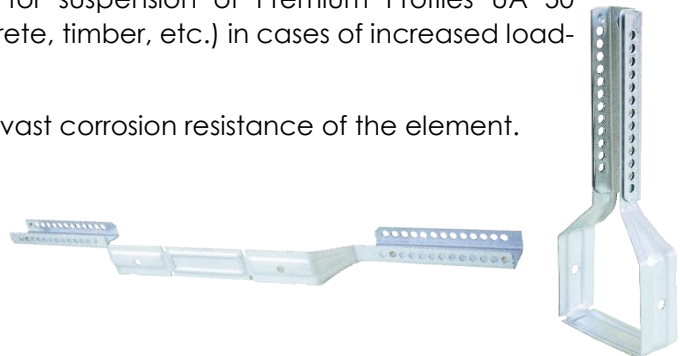


Standard Classification:

In compliance with **EN 13964:2014**



Advantages:

- ✓ Ensures a stable and rigid connection of the suspended ceiling system to the structural soffit.
- ✓ Recommended load carrying capacity of max 0.40 kN
- ✓ Pre-cut service holes for increased precision in leveling of the suspended ceilings.

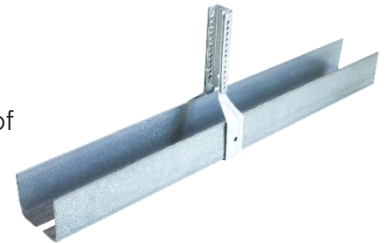

Technical Data:

Parameters:	Specification:
Steel thickness	0.8 mm
Length	150 mm
Reaction to fire	A1
Corrosion resistance class:	B
Recommended load-bearing capacity F	0.40 kN
Max. Load-bearing capacity admF	0.40 kN

Packaging and Storage:

- ✓ 100 pieces in every box. Packaged in distinctive green Technogips Pro boxes.
- ✓ Store in a dry, covered, and ventilated area

Safety recommendations:

- ✓ Product not classified as hazardous.
- ✓ To prevent physical harm, the use of safety gloves is strongly advisable when working with this product.

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification. 2024©