


## Premium Profile Z140 UW 50 | 75 | 100 | 125 | 150

Technogips Pro Premium Profile UW 50 | 75 | 100 | 125 | 150 (horizontally positioned) ideal for the construction of light partition walls, wall linings and facades through dry construction methods.

The specially designed 3D structure of the steel increases its material strength capacity and ensures uniformity and stability when perforating and fastening with drywall screws.

The distinctively grey colour zinc coating guarantees the profile to be vastly corrosion resistant.

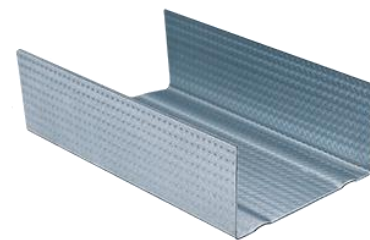

### Standard Classification:

In compliance with EN 14195:2015 & DIN 18182-1:2015,  
Type: **U 40/50/40 | U 40/75/40 | U 40/100/40 | U 40/125/40 | U 40/150/40**




### Advantages:

- ✓ The 3D structure of the metal results in an increase of yield strength and the ease and durability in the application of Drywall Screws.
- ✓ A vital component in each of the Technogips Pro high-performance systems for fire protection and sound insulation.
- ✓ Fast and easy installation.
- ✓ Lightweight with high strength.
- ✓ Guaranteed uniformity of the zinc coating.

### Technical data:

| Technical Characteristics                         |        |
|---------------------------------------------------|--------|
| Steel Thickness                                   | 0.6 mm |
| Reaction to Fire                                  | A1     |
| Scope of Zinc Coating                             | Z140   |
| Yield Strength R <sub>r</sub> , N/mm <sup>2</sup> | 140    |



| Product                     | Dimensions A/B/C | Thickness | Length      |
|-----------------------------|------------------|-----------|-------------|
| Premium Profile Z140 UW 50  | 40/50/40 mm      | 0.6 mm    | 3.0   4.0 m |
| Premium Profile Z140 UW 75  | 40/75/40 mm      | 0.6 mm    | 3.0   4.0 m |
| Premium Profile Z140 UW 100 | 40/100/40 mm     | 0.6 mm    | 3.0   4.0 m |
| Premium Profile Z140 UW 125 | 40/125/40 mm     | 0.6 mm    | 3.0   4.0 m |
| Premium Profile Z140 UW 150 | 40/150/40 mm     | 0.6 mm    | 3.0   4.0 m |

### Packaging and Storage:

| Product                     | Thickness | Length      | Profiles / Pack | Profiles / Pallet |
|-----------------------------|-----------|-------------|-----------------|-------------------|
| Premium Profile Z140 UW 50  | 0.6 mm    | 3.0   4.0 m | 8 pcs           | 192 pcs           |
| Premium Profile Z140 UW 75  | 0.6 mm    | 3.0   4.0 m | 8 pcs           | 128 pcs           |
| Premium Profile Z140 UW 100 | 0.6 mm    | 3.0   4.0 m | 8 pcs           | 96 pcs            |
| Premium Profile Z140 UW 125 | 0.6 mm    | 3.0   4.0 m | 15 pcs          | 60 pcs            |
| Premium Profile Z140 UW 150 | 0.6 mm    | 3.0   4.0 m | 15 pcs          | 60 pcs            |

Humidity and other atmospheric conditions can lead to the formation of white oxidised patches on the profile's surfaces. It is advisable to strictly follow the storage instructions prescribed on how to store the product safely:

- ✓ Store in a dry, covered, and ventilated area.
- ✓ In the case of extended exposure to the natural elements (not recommended), the bundles will require to be positioned at a small angle for the collected water to drain.

### Safety Recommendations:

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.